

ISBN 978-602-68314-2-6



International Conference

and call for paper ADRI JATIM - UNITOMO Surabaya



PROCEEDING of CONFERENCE

ACCELERATION OF SCIENTIFIC KNOWLEDGE DEVELOPMENT IN THE ERA OF ASEAN ECONOMIC COMMUNITY

Thursday, 10th November 2016
University of Dr. Soetomo | Surabaya - East Java | Indonesia

Supported by:



Sponsorship by:



Table of Contents

INDIVIDUAL CREATIVITY ENHANCEMENT TO IMPROVE LECTURER PERFORMANCE THROUGH JOB SATISFACTION ON LECTURER OF MANANEGEMNT STUDIES AUSTRALIA-INDONESIA	1
INDIGENOUS AND NON-INDIGENOUS AUSTRALIANS, THE NEGOTIATION OF A NATIONAL IDENTITY.....	2
INTERNATIONAL ACCOUNTING STANDARDS AND SELECTED MIDDLE EAST STOCK EXCHANGES	3
REVIEWING THE INTEGRATED FLOOD RISK MANAGEMENT SYSTEM IN GERMANY AFTER THE FLOOD OF THE CENTURY IN 2013.....	4
THE INFLUENCE OF SCORING SYSTEM ELECTRONIC PROCUREMENT ON THE DEVELOPMENT OF CONSTRUCTION SERVICES IN INDONESIA.....	5
REDESIGN OF WORK ENVIRONMENT WITH ERGONOMIC INTERVENTION TO DECREASE EMPLOYESS' FATIGUE.....	6
THE USE OF WEB-BASED GEOGRAPHICAL INFORMATION SYSTEM TO DETERMINE THE ALLOTMENT OF LAND SETTLEMENT.....	6
RESCUE MODEL OF COASTAL SETBACKS FROM SAND EXPLOITATION	7
TEST THE EFFECTIVENESS OF WASTE DISCONNECT ABON BASED RAW FISH BANDENG THORNS AND SPINACH LEAVES WITH ADDITION OF COMMUNITY VILLAGE PANELISTS SEMOLO SURABAYA	8
INFORMATION NETWORK MODEL DEVELOPMENT AND USE OF ALTERNATIVE MEDIA IN DEVELOPMENT TRADITIONAL AGRICULTURAL EQUIPMENT AT THE DISTRICT TASIKMALAYA WEST JAVA	8
RISK COMMUNICATION STRATEGY IN INCREASING DISASTER PREPAREDNESS IN THE DISTRICT OF PANGANDARAN (STUDY ON PUBLIC EDUCATION IN SHAPING DISASTER RESILIENT COMMUNITIES IN THE DISTRICT OF PANGANDARAN).....	9
ERGONOMIC EVALUATION FACTOR IN FACILITIES AND FURNITURE CRAFTSMEN ENVIRONMENT AT BOJONG VILLAGE	11
LONG APUNG LAND SIDE FACILITIES DESIGN AND DEVELOPMENT.....	11
SUPERVISED LEARNING SVM OF LOG EDGE DETECTION X-RAY IMAGE TO RECOGNIZE OBJECT KNIVES AT JUANDA AIRPORT.....	12
AUTO-TUNING METHOD FOR DESIGNING MATLAB DC MOTOR SPEED CONTROL WITH PID(PROPORTIONAL INTEGRAL DERIVATIVE).....	12
THE EFFECT OF TiO2 COMPOSITION ON THE SELF CLEANING ON A GLASS SURFACE	13
COMPARISONS GRANTING SHEEP BLOOD AND HUMAN BLOOD IN THE BLOOD AGAR PLATE (BAP) MEDIUM BY HAEMOLYSIS	13



Certificate of Appreciation

This is to certify that

LIZDA J MAWARANI

has participated successfully as

SPEAKER

in the

International Conference and Call for Paper

Acceleration of Scientific Knowledge Development

in the Era of Asean Economic Community

University of Dr. Soetomo Surabaya, November 10th, 2016

Dr. Bachrul Amiq, SH., MH.

Rector of Dr. SOETOMO University

Professor Peter Newcombe PhD

University of Queensland Australia

Christine Getzler Vaughan

*Public Affairs Officer
US Consulate General Surabaya*

Dr. H. Achmad Fathoni Rodli, M.Pd.

General Chairman of ADRI



THE EFFECT OF TiO₂ COMPOSITION ON THE SELF CLEANING ON A GLASS SURFACE

Lizda J Mawarani

Department of Engineering Physics, Sepuluh Nopember Institute of Technology, Surabaya, Indonesia
E-mail: lizrifa@gmail.com

Abstract. One of the technologies that are being developed for self-cleaning applications is to utilize TiO₂ photocatalytic material through a photocatalytic chemical reaction process assisted by the energy of ultraviolet rays. Photocatalytic effect decomposes the impurities in the form of organic compounds. TiO₂ synthesized by using precursor of TiCl₃. The synthesis incorporates ammonia washing and calcination at 300°C for 4 hours to obtain TiO₂ anatase. TiO₂ solution was coated on the glass sample in the form of paste made by mixing PEG 4000, chloroform, and TiO₂ powder. TiO₂ composition was varied, i.e. 0 gram, 1 gram, 1.5 grams, 2 grams, 2.5 grams and 3 grams, while PEG and chloroform amounts fixed for all variations observed. Coatings were taken by the doctor blade technique. Self-cleaning testing was using two types of impurities, namely mud and dyes. The test was done in two ways, namely hydrophilic and photocatalytic properties tests. The results showed that the best self-cleaning properties were obtained on the sample with a composition of TiO₂ of 3 grams with the ability to eliminate impurities up to 96% under direct sun and 74% in UV radiation. It has a transmittance difference of up to 58.8%. The hydrophilic properties depend on photocatalytics. However, due to profuse agglomeration of TiO₂ the hydrophilic properties decrease.

Keywords: anatase, PEG, self-cleaning, TiO₂

I. INTRODUCTION

One of the technologies developed for self-cleaning applications is the use of photocatalytic TiO₂. TiO₂ photocatalytic effect can decompose organic compounds that stick to CO₂ and H₂O [1]. Another effect of the photocatalyst is becoming more hydrophilic nature when illuminated with UV light or sunlight. Research on this topic conducted by many researchers [2]-[6]. The use of TiO₂ in the paint showed the best self-cleaning properties of the sample with 2% TiO₂ with a ratio of anatase: rutile is 90: 10 [7]. Research on the application of TiO₂ as antifogging and self-cleaning by spraying on the windshield [8] showed that the TiO₂ improve antifogging properties and self-cleaning. Polyethylene glycol (PEG) has been successfully used to distribute TiO₂ on engineering plastics as antifogging and self-cleaning agent [8]. In this research, PEG 4000 used as a dispersant to prevent agglomeration of TiO₂. In this study used materials TiO₂ and PEG 4000 to be applied to the glass in order to know the influence of the composition of TiO₂ on the ability of self-cleaning properties on a glass surface using PEG 4000. Particularly dispersant to determine the effect of TiO₂ composition of the hydrophilic nature and composition influence on the TiO₂ photocatalytic properties.

II. EXPERIMENT METHOD

A. Nano-TiO₂ Synthesis

In this study used TiO₂ synthesized with the main ingredient of TiCl₃. TiO₂ synthesized expected 100% anatase structure. TiO₂ synthesized using coprecipitation method [9] wherein TiCl₃ 10 ml stirred together with 4.7 ml of distilled water and 0.3 ml of HCl 37% using a magnetic stirrer at a

temperature of 45°C at a constant speed of magnetic stirrer for 2-3 minutes. Then added 20 ml of HCl 37% and wait until the purple aqueous solution. After it was added NH₄OH 25% 50 ml and continue stirring for 5 minutes, then round off while the magnetic stirrer for 5 minutes under temperature conditions remain 45°C. The solution was stirred again by adding more NH₄OH 50 ml every 5 minutes until the solution changes color to white and produces a precipitate. The solution is allowed to stand about a day until all the resulting sediment settles in the bottom glass beaker, then washing using distilled water up to the smell of ammonia (NH₄OH) is missing. The precipitate that had no smell of ammonia is then calcined at 300°C temperature for 4 hours to obtain 100% anatase phase. The results of the calcination smoothed by using a mortar to a powder TiO₂ fine. Synthesis of TiO₂ done several times to get the required amount of TiO₂.

Characterization of TiO₂ synthesized done to ensure 100% anatase phase. Characterization is done by using X-ray diffraction (XRD). Besides being able to show the structure of TiO₂ anatase or not by referring to JCPDS 89-4921, also obtained FWHM values to search for TiO₂ particle size, using the formula:

$$\text{Particle size} = 0.89\lambda \times \text{FWHM} \times \cos \theta \quad (1)$$

wherein 0.89 is a constant value, and λ is the wavelength of the x-rays used in the testing XRD0 that is 15406 Å.

B. Sample Preparation

Samples here is a glass surface coated with a solution of TiO₂. After synthesis of TiO₂ completed in line with expectations, then the sample preparation. In this sample

preparation includes two stages that make TiO₂ solution that will be superimposed and then coating them on glass to be tested characteristics.

Preparation of TiO₂ solution to be applied is made by mixing 10 grams of PEG 4000 and 25 ml of chloroform is stirred with a magnetic stirrer at room temperature for 5 minutes until all of the PEG dissolves completely and there are no lumps. Then the TiO₂ powder is inserted and continue stirring until evenly for 5 minutes. TiO₂ powder composition used in this study is 0 gram, 1 gram, 1.5 gram, 2 grams, 2.5 grams and 3 grams of the amount of PEG and chloroform was the same every sample.

Then TiO₂ coated on the glass. The glass used in this research is plain clear glass with dimensions of 10cm x 5cm x 0.3cm, and the amount of glass used is 3 pieces in each setting. TiO₂ coating solution refers to the doctor Blade technique of glass that has been coated TiO₂ wait until dry with only aired to be dried in about a day until all the layers dry evenly.

C. Self Cleaning Testing

Tests performed include hydrophilic properties testing and photocatalytic properties testing.

1) *Hydrophilic Testing*: nature of a test to determine the angle formed between the glass surface and tangential line of the radius of water droplets. Measurements were performed with three different conditions by sunlight that can be accepted by the glass sample, on the terrace, and indoors.

2) *Photocatalytic Testing*: the photocatalytic testing done in several ways, namely by the drying in the sun to sample impurities mud and dye, with a quick immersion into the water, as well as irradiation with UV light. For testing in the sunlight, the samples that have been granted an impurity weighing 0.5 grams then dried under direct sunlight during 40 hours. After that, the sample is weighed again to determine how many impurities are missing. Then dipped quickly into the water and then dried and weighed. This is done also for the UV irradiated samples.

Other photocatalytic testing in order to know self-cleaning properties is done by giving the dye on the surface of the sample. Prior to drying, all samples that have been prepared beforehand measured its absorbance and transmittance. After the sample is dried in direct sunlight for 40 hours, then measured again the absorbance and transmittance value after drying. Absorbance and transmittance value before and after drying was compared to see the difference in the color degradation that occurs in the dye attached to the TiO₂ layer.

III. RESULTS

Here are the results and a discussion of the characteristics of TiO₂ synthesized as well as self-cleaning characteristics which include hydrophilic testing and photocatalytic testing.

A. Synthesis TiO₂ Results

TiO₂ is synthesized with the main ingredient TiCl₃ expected 100% anatase and nanoscale. Testing of the TiO₂ synthesized to know the result expected, XRD test was done. The XRD test results (Figure 1) it shows that the first peak appeared in number 25.2577°. Comparing these peaks with reference JCPDS 89-4921 for anatase TiO₂ where the

reference appears first peak at a value of about 25°. It shows that the synthesized TiO₂ in anatase structure.

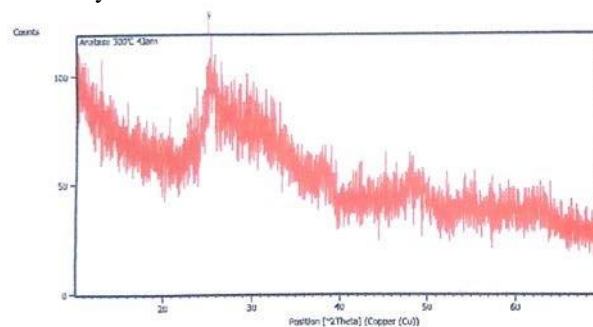


Fig.1 XRD testing result of TiO₂ synthesized

From the graph of the XRD results were also obtained FWHM value which of this values can be calculated to obtain the particle size of the TiO₂. FWHM value is 0.9792. After calculating the TiO₂ particle size with equation (1) obtained amounted to 8.2233nm.

B. Effect of TiO₂ Composition to The Contact Angle

The resulting contact angle on the surface of TiO₂ is affected by the concentration of TiO₂ used and measurement conditions. It is shown on the measurement results are plotted as in Figure 2.

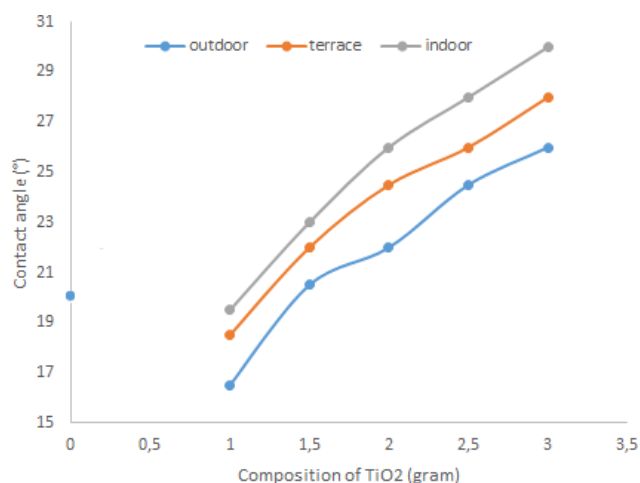


Fig. 2 Effect of TiO₂ composition of the contact angle

In Figure 2 shows that the sample with 1 gram TiO₂ has the smallest contact angle compared with other TiO₂ composition on the samples. This shows that the composition of TiO₂ coated on the glass affect the contact angle formed. Then the value of the contact angle is generated on the composition of TiO₂ 1 gram is equal to 16.5° for measurements in the sunlight, 18.5° for measurements on the terrace, and 19.5° for measurements in the room by lighting the lamp. Based on the results obtained, the measurement condition also affects the contact angle formed, where all three conditions used to get sun exposure is different. The value of the contact angle for a place exposed to direct skylight has a contact angle of the smallest, it is because TiO₂ when the skylight will undergo a process of photocatalyst where the presence of the process that will

make the contact angle of water will decrease so that it becomes increasingly hydrophilic.

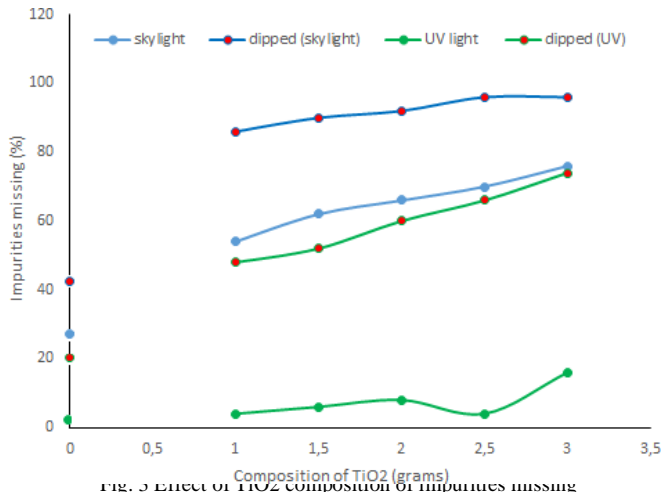


Fig. 3 Effect of TiO₂ Composition on Impurities missing

From Figure 3 shows the amount of impurities is missing at most after the irradiation for 40 hours using a UV lamp is on the sample with a composition of TiO₂ amounted to 3 grams with a value of 16%. As for the value of impurity missing after quick immersing, the most also on the sample with a composition of TiO₂ by 3 grams, with 74% of the total impurities are given.

C. Effect of TiO₂ Composition of The Gradations of Color Impurities

Datas of transmittance and absorbance value at initial measurement of all the samples have a value that is not much different. Transmittance value after skylight irradiated for 40 hours obtained the greatest value contained in the sample with a composition of TiO₂ as much as 3 grams.

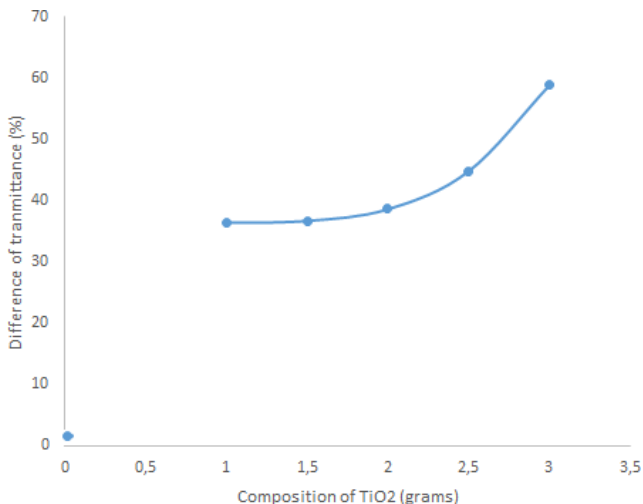


Fig. 4 Effect of TiO₂ composition of the difference value of transmittance between before and after skylight irradiated

The difference in transmittance value shown in Figure 4. The values shown in the composition of TiO₂ as much as 0 grams has a transmittance value of the difference is very small, it shows that there is no major change in the transmittance value on the sample without TiO₂ (zero on composition of

TiO₂). It can be seen that the difference in transmittance value gains with the rise of compositions TiO₂.

Based on the results obtained can be said that best self-cleaning properties are that the sample have the greatest transmittance value. So samples which have self-cleaning properties it is best to sample the composition of TiO₂ as much as 3 grams.

IV. CONCLUSIONS

Photocatalytic properties of the best owned by the sample with a composition of TiO₂ as much as 3 grams of the ability to remove impurities up to 96% in the drying in the sun and 74% of UV radiation, and has a transmittance difference of up to 58.8%. Also hydrophilic properties strongly influenced by photocatalytic, but several incompatibility hydrophilic nature of the sample caused by the agglomeration of TiO₂ powder in the surface layer.

REFERENCES

- [1] Diebold, U, *Structure and Properties of TiO₂ surfaces : a brief review*, Applied Physics A, Materials Science & Processing, 2002, vol. 76, 1 – 7
- [2] Benedix, Roland., et al., *Application of Titanium Dioxide Photocatalysis to Create Self-Cleaning Building Materials*, LACER, 2000, No. 5
- [3] Nurul, Indriana, dan Sofy, *Self Cleaning Glass Based on Acid-Treated TiO₂ Films with Palmitic Acid as Model Pollutant*, Indo. J. Chem. 8(2), pp.200 – 206, 2008.
- [4] Rachmat dan Jarnuzi, *Preparasi Lapisan Tipis TiO₂ sebagai Fotokatalis: Keterkaitan antara Ketebalan dan Aktivitas Fotokatalisis*, Makara, Jurnal Penelitian Universitas Indonesia Volume 5, nomor 2, Seri Sains, hal. 81-91, 2001.
- [5] Ragesh, P., et. al., *A Review on Self-Cleaning and Multifunctional Materials*, Cite This: J. Mater. Chem. A , 2014, 2, 14773
- [6] Samah, A.Z., et. al., *Superhydrophilicity on Microstructured Titanium Surfaces Via a Superficial Titania Layer with Interconnected Nanoscale Pores*, 2013, 51
- [7] Kusmahetiningsih, N, *Aplikasi TiO₂ Sebagai Self Cleaning pada Cat Tembok dengan Dispersant Polietilen Glikol (PEG)*. Jurnal Teknik POMITS, 2011, Vol. 1, No.1, p 1- 5
- [8] Lono, J.E.S, *Pelapisan TiO₂ untuk Anti-Fogging dan Self-Cleaning pada Kaca Mobil dengan Teknik Penyemprotan*, 2010.
- [9] Anggi dan Dahyunir, *Sintesis Lapisan TiO₂ Menggunakan Prekursor TiCl₄ untuk Aplikasi Kaca Self Cleaning dan Anti Fogging*, Jurnal Fisika Unand, 2013, Vol. 2, No. 2